

# CSABA PETITE DUO

## TOUCH FREE DECK MOUNTED FAUCET AND AUTOMATIC SOAP DISPENSER

### SPECIFICATIONS

Touch-free deck-mounted electronic faucet. For cold or premixed water. Powered by IP67 Dual power input box connected with power splitter to 12V transformer. Integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure. Chrome plated body, other finishes available. Activated by concealed sensor built into the spout. Filter included. Sensor includes a low battery indicator. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. Matching touch free electronic soap dispenser for deck mounted installations. Chrome plated body, other finishes available. Activated by concealed sensor built into the spout. Includes a 1 liter soap bottle and bottle support. The following functions can be performed by using Stern remote control: soap quantity selection, refill the soap tank, temporary off, coming back to factory settings. Includes power splitter to enables both units to be powered from the same transformer.

### OPERATION

Touch-free electronic faucet and soap dispenser are automatically activated when users place their hands in the sensor range and stops when the users remove their hands. Soap dispenser closes automatically without dripping. The Csaba Petite Duo helps ensure hygiene and cleanliness in commercial restrooms with less space.

### APPLICATION

Combining an elegant design with vandal-resistant features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water and soap. Prevents cross contamination. Ideal for applications where smaller units are required such as public transport restrooms.



### PRODUCT AT A GLANCE

#### WATER

Installation	Deck mounted
Power Supply	IP67 Dual power input box connected with power splitter to 12V transformer
Operating pressure	0.5 - 8.0 bar (7 - 116 PSI). With a pressure over 8 bar, use a pressure reducing valve.
Water supply	Cold or premixed water
Water Saving options	0.5 GPM / 1.89 LPM - PCA spray 1.0 GPM / 4 LPM - PCA spray
Water temperature	70°C Maximum
Security Time	Auto shutoff after 90 seconds. adjustable by remote control

#### SOAP


Installation	Deck mounted. Regular installation with the bottle below the lavatory.
Power Supply	12V transformer
Soap Dose	Factory setting for 0.7 to 0.9 cc depending on the selected soap. The soap quantity can be changed using the soap dispensers remote control.
Refill	Easy to use refill button in order the soap will start to come out of the soap dispenser spout. This function can also be performed with the remote control.

### ORDERING INFORMATION

MODEL	CODE
CSABA PETITE DUO	233041

### OPTIONS

OPTION	CODE
Soap and Water Remote Control	07100014

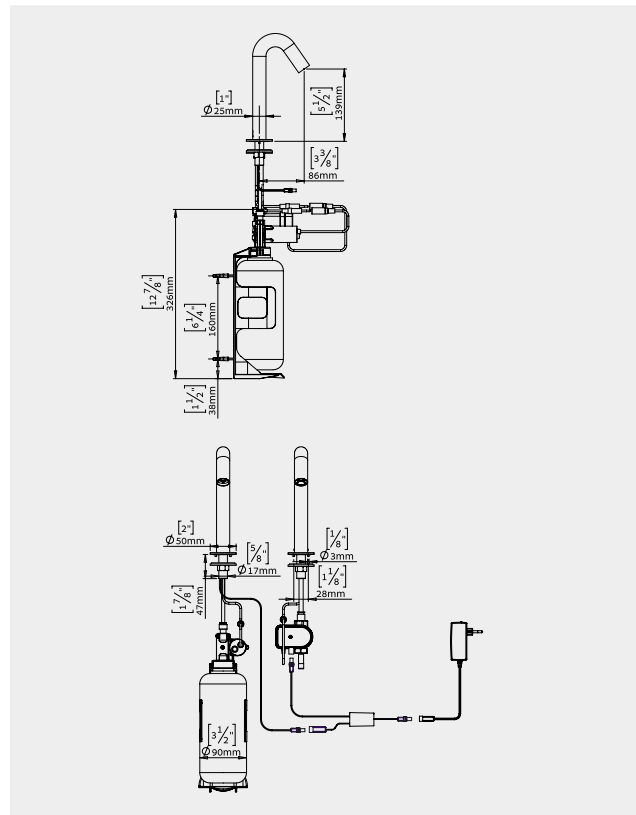

### ADVANTAGES



LEED RATING



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



LEAD FREE



EASY TO INSTALL

777 Passaic Avenue  
Clifton NJ, 07012  
USA: sternusa@sternfaucets.com  
International: info@sternfaucets.com  
Toll Free: 1-800-4364410  
www.sternfaucets.com