

APOLLO MEDICAL F

TOUCH-FREE ELECTRONIC WALL-MOUNTED FAUCET

SPECIFICATIONS

Touch-free wall-mounted electronic faucet. With a mixer for water temperature adjustment for hot and cold water. Gooseneck Spout. Powered by an internal 9V battery or a 9V transformer. Battery version includes a low battery level indicator. Latching solenoid valve is located inside the product. Auto shutoff after 90 seconds. Adjustable settings by remote control: security time, delay in, delay out, on-off and reset to factory settings.

OPERATION


Touch-free electronic faucet. The faucet is automatically activated when users place their hands in the sensor range and stops when users move away from the sensor range.

APPLICATION

Touch-free faucet. Enables patients and medical personnel to wash hands without touching the faucet. Prevents cross contamination. Helps washrooms to stay cleaner. Ideal for hospitals, laboratories, dental clinics and commercial kitchens.

PRODUCT AT A GLANCE

Installation	Exposed wall-mounted
Power Supply	<ul style="list-style-type: none"> 9V battery 9V transformer
Operating water pressure	0.5-5.0 BAR (7-72.5 PSI), for water pressure greater than 5.0 bar use a pressure reducing valve.
Water supply	Hot and cold water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	90 seconds. Adjustable by remote control

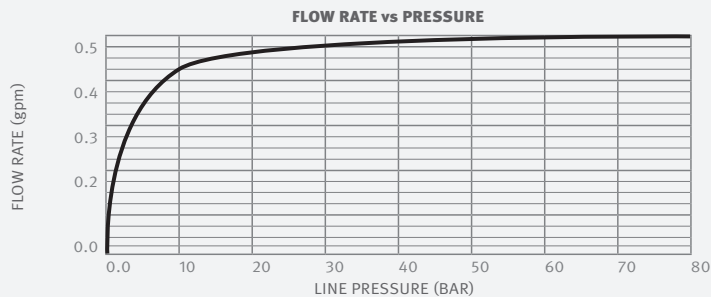


ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL FEATURES
APOLLO MEDICAL FB	314530	9V battery	Exposed installation Gooseneck spout
APOLLO MEDICAL FE	314540	9V transformer	Mixer for water temperature adjustment

OPTIONS

OPTION	CODE
Remote control	07100005

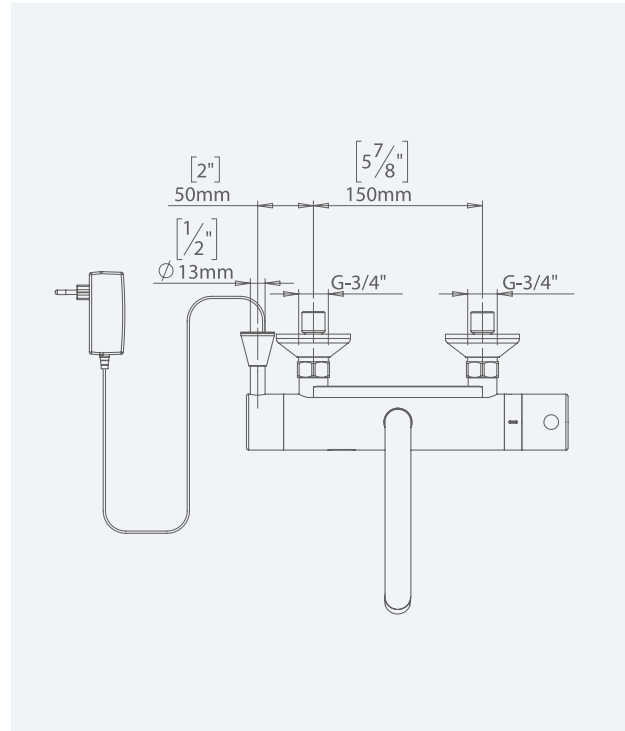

ADVANTAGES



OPTIONAL HYGIENE FLUSH



APPROVALS



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com