

NEPTUNE 1032

ELECTRONIC SHOWER CONTROL

SPECIFICATIONS

Touch-free electronic shower control. Activated by infrared Wave On/Off sensor. For cold and premixed water. Includes filter. All components are located inside the product body for added vandal protection. Powered by a 9V battery or a 9V transformer. 24 hour hygiene flush is included. The shower will automatically shut off after a factory set flow time of 2 minutes. Flow time is adjustable on site.

OPERATION

Touch free electronic shower control. The shower would be activated once the user presents his hand within the sensor range and will stop when the hand is presented again or after a preset cycle of 120 sec.

APPLICATION

The easy touch action allows use by young children, the elderly and the disabled. Ideal for hospitals, hotels, spas, resorts, swimming pools and private residences.

PRODUCT AT A GLANCE


Installation	Concealed installation in concrete, brick walls
Power Supply	<ul style="list-style-type: none"> • 9V battery • 9V transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 PSI
Water supply	Cold and premixed water
Water Temperature	Maximum 70°C

ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL SPECIFICATIONS
NEPTUNE 1032	613200	9V battery	Concealed installation
NEPTUNE 1032 E	613400	9V transformer	

OPTIONS

OPTION	CODE
Remote control	07100005

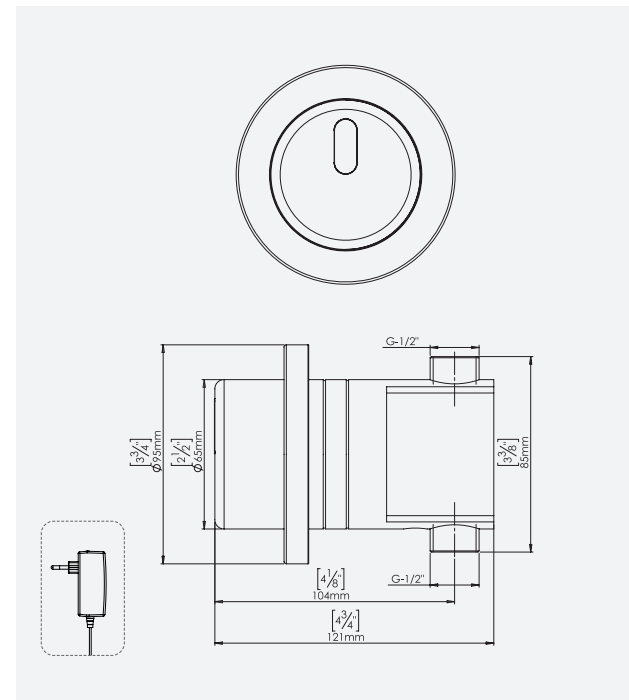

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED

APPROVALS



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com