

SWAR – SOAP WATER AIR REVOLUTION

Complete sanitary cabinet with a lockable mirror. Includes high speed hand dryer, mixing valve, touch free faucet, touch free soap dispenser and LED pictograms for intuitive user guidance. Delivered with remote controls to adjust soap dosage, LED colors and other customization settings.


- Drastically reduces water and soap consumption
- Optional thermostatic control for optimal temperature
- No physical contact. Helps to protect users against cross contamination
- Sensor settings and soap dosage adjustable by remote control (faucet & soap dispenser)

PRODUCT AT A GLANCE

SOAP	Soap	6 Liter soap tank The peristaltic pump enables the use of a wide range of liquid soap, detergent or antibacterial gel
	Viscosity	100 - 3800 cPs
	Refill	Soap priming by remote control or by an easy-to-use manual refill button
WATER	Operating pressure	0.5-8.0 bar / 7.0-116.0 PSI
	Water supply	Hot and cold water
	Water flow	1 GPM / 3.78 LPM - PCA Stream; 0.5 GPM / 1.89 LPM – PCA Spray; 0.35 GPM / 1.32 LPM – PCA SPRAY; 1.32 GPM / 5 LPM - PCA Stream
	Water temperature	70°C Maximum
	Security time	Auto shutoff after 90 seconds. Adjustable by remote control
AIR	Operating voltage	120/240 VAC, 50/60 HZ, 1.0 kW
	Output warm air volume	42-60 CFM (71-102 m3/h)
	Drying time	less than 15 seconds
	Stand by power	less than 0.5W
	Sensor range	standard 6" (152mm +/- 20mm)
	Timing protection	60 seconds auto shut off

ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL FEATURES
SWAR	280460	12V transformer	Complete cabinet including mirror, hand dryer, mixing valve, touch-free faucet and touch free liquid soap dispenser

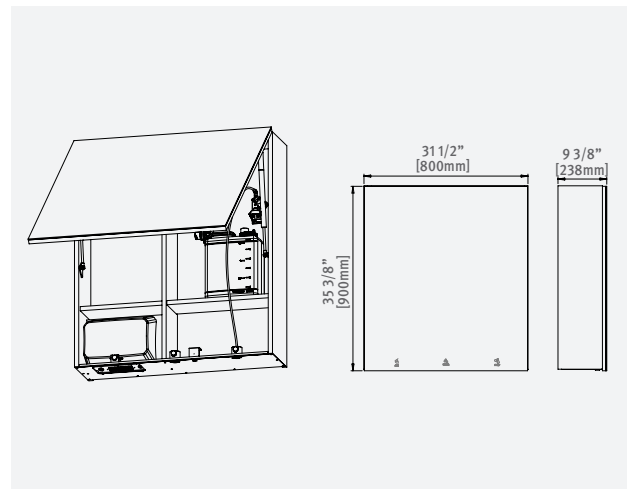

ADVANTAGES



LEED RATING



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



CLOGGING FREE



ADA DESIGNED

777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410

www.sternfaucets.com