SMART PLUS TOUCH-FREE ELECTRONIC LAVATORY FAUCET

SPECIFICATIONS

Touch-free electronic faucet for deck-mounted installations. Activated by infrared sensor. Tall version 338 mm / 13.25". For cold or premixed water. Filters included. Chrome plated body, other finishes available. Battery version includes a low battery indicator. Latching solenoid valve is located above deck inside the product for added vandal protection. Adjustable setting by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. 24 hour mandatory hygiene flush available upon request.

OPERATION

Touch-free electronic faucet. The faucet is automatically activated when the users place their hands in the sensor range and stops when the users remove their hands.
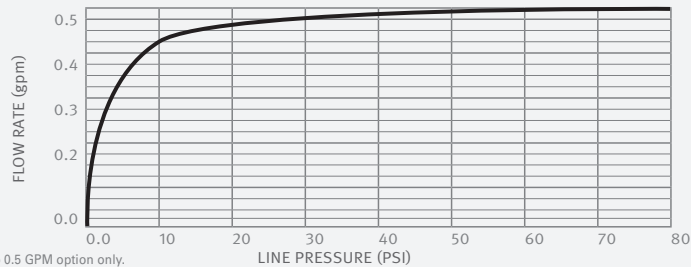
APPLICATION

Deck-mounted faucets. Combining an elegant minimalist design with anti-vandal features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Prevents cross contamination. Ideal for stadiums, train and bus stations and highway rest stops.

PRODUCT AT A GLANCE

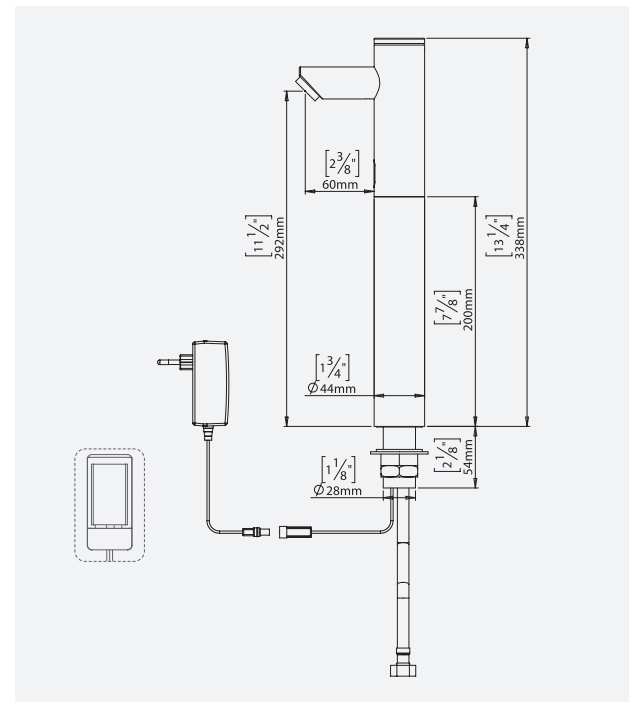|	
Installation	Deck-mounted
Power Supply	• 9V battery • 9V transformer
Operating pressure	0.5-8.0 bAR / 7.0-116.0 PSI
Water supply	Cold or premixed water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	Auto shutoff after 90 seconds. adjustable by remote control

FLOW RATE vs PRESSURE

This graph applies to 0.5 GPM option only.

ORDERING INFORMATION

MODEL	CODE	POWER
SMART PLUS B	235150	9V battery
SMART PLUS E	235250	9V transformer

OPTIONS

OPTION	CODE
Remote control	07100005
Matching battery-powered soap dispenser	235940
Matching transformer-powered soap dispenser combination	235930
Lead free versions	Upon request

STERN
STERN ENGINEERING LTD.

ADVANTAGES

- LEED RATING
- OPTIONAL HYGIENE FLUSH
- SOAP AND WATER
- GERM FREE
- ADJUSTABLE SETTINGS
- EASY TO INSTALL
- ADA DESIGNED

APPROVALS

cUPC®

ILGBC

WRAS APPROVED PRODUCT
COMPLIES TO ASME A112.18.1 / CSA B125.1