TRENDY L

SPECIFICATIONS

Electronic lavatory faucet for cold or premixed water, activated by infrared sensor. Longer spout. Powered by 9V Transformer. Chrome plated body. Sensor range is adjustable by remote control. Other sensor settings (delay in, delay out and security time) can also be adjusted by remote control. Faucet will automatically shut off after being used for more than 90 seconds. Sensor features a low battery level indicator. Other finishes available.


OPERATION

Touch free electronic faucet .The faucet is activated automatically when the user brings his hands within the sensor range, and stops when the user removes his hands.

APPLICATION


Deck mounted faucet combining an elegant design with anti-vandal features. Helps washrooms stay cleaner and save water. Prevents cross contamination.

Installation	Lavatory mounted
Recommended Pressure	0.5-8.0 BAR / 7.0-116 PSI. For a pressure over 8 bar use a pressure reducing valve.
Power Supply	 External battery box with 9V Alkaline Battery IP 67 battery box including 6xAA 1.5V Alkaline batteries. 9V Transformer IP 68 Encapsulated 9V Transformer
Water Saving Options	6 LPM / 1.58 GPM ; 4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM
Water Supply	For cold or premixed water
Water temperature	Max 70º
Security Time	90 seconds. Adjustable with Stern's remote control.

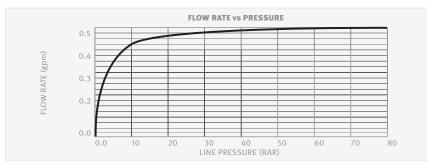





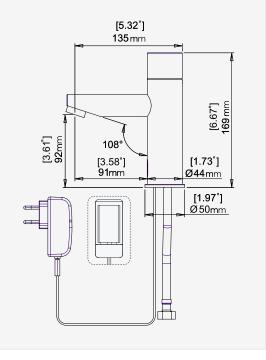



777 Passaic Avenue Clifton NJ, 07012 USA: sternusa@sternfaucets.com International: info@sternfaucets.com

www.sternfaucets.com