

# TUBULAR TOUCH

## SPECIFICATIONS

Electronically operated self-closing lavatory faucet, activated by touching the designated area in the faucet cap. For cold or premixed water. Filter included. The faucet will automatically shut off after a factory set flow time of 8 seconds would pass. The flow time is adjustable on site if required.

## OPERATION

When a user touches the designated area in the middle of the faucet cap, a flow cycle of 8 seconds will be completed. If the user does not need more water, he can touch the designated area again to stop the water flow before the default flow time has passed.


## APPLICATION

Wall mounted faucet combining an elegant minimalist design with anti vandal features. Enables an easy installation and is long lasting even in the harshest installation sites. Helps washrooms to stay cleaner and save water.

## PRODUCT AT A GLANCE

Installation	Wall Mounted
Power supply options	9V Transformer / Battery Box
Operating pressure	0.5 - 8.0 bar (7 - 116 PSI) With a pressure over 8 bar, use a pressure reducing valve
Water Saving Options	5 LPM / 1.32 GPM ; 1.89 LPM / 0.5 GPM
Water temperature	Max 70°.
Water Supply	Cold or premixed water
Flow time	8 seconds

FLOW RATE vs PRESSURE

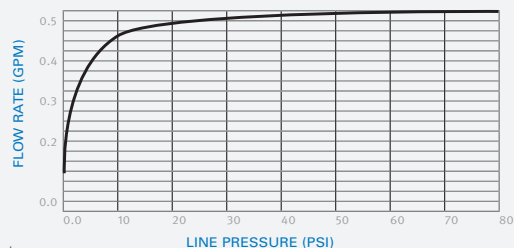


## ORDERING INFORMATION

MODEL	POWER
TUBULAR TOUCH B	350140
TUBULAR TOUCH E	350130
TUBULAR TOUCH LB	350250
TUBULAR TOUCH LE	350150

## OPTIONS

OPTION	CODE
Remote control	07100005
Integrated Thermostatic Mixing Valve	07010198

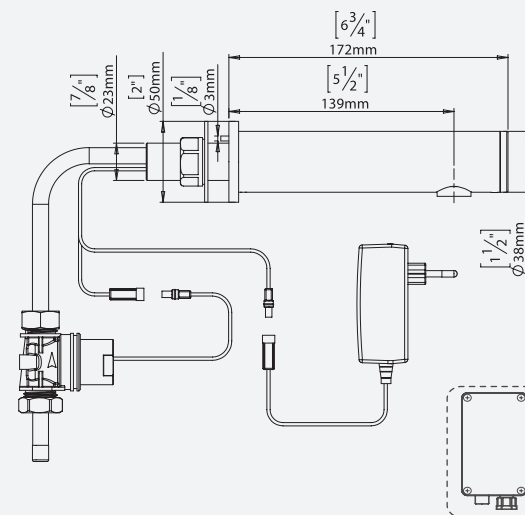

**stern**  
STERN ENGINEERING LTD.

## ADVANTAGES



## APPROVALS



777 Passaic Avenue  
Clifton NJ, 07012  
USA: [sternusa@sternfaucets.com](mailto:sternusa@sternfaucets.com)  
International: [info@sternfaucets.com](mailto:info@sternfaucets.com)  
Toll Free: 1-800-4364410  
[www.sternfaucets.com](http://www.sternfaucets.com)