

## TUBULAR DP TRIO

Touch free soap dispenser, touch free faucet and hi-speed hand dryer for public bathroom use. Operated by IR sensor. Available with full brass body or AISI316 material.

Advantages:

- Drastically reduces water consumption.
- No physical contact. Helps to protect users against cross contamination.
- Minimizes hand washing drips to floors and counters
- Provides a complete electronic soap, water and air experience.

### TUBULAR DP FAUCET - PRODUCT AT A GLANCE

Installation	Concealed wall mounted installation in brick or concrete walls
Power Supply	12V transformer (for faucet and soap dispenser with power splitter)
Operating pressure	0.5-8.0 BAR / 7.0-116.0 PSI
Water supply	Cold and premixed water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	90 seconds. Adjustable by remote control

### TUBULAR 2030 SOAP DISPENSER - PRODUCT AT A GLANCE


Installation	Concealed wall mounted installation in brick or concrete walls
Power Supply	12V transformer (for faucet and soap dispenser with power splitter)
Soap	1 Liter soap bottle. Peristaltic pump enables the use of any kind of liquid soap, detergent or antibacterial gel
Soap Dose	Default setting: 1.2-1.6 cc Adjustable by remote control in accordance to the selected soap.
Refill	Soap priming operated by remote control or by easy-to-use manual refill button

### TUBULAR DP HD - PRODUCT AT A GLANCE

Installation	Concealed wall mounted installation in brick or concrete walls
Operating Voltage	110V-120/220V-240VAC, 50/60 HZ, 1.3-1.6KW
Motor Thermal Protection	Auto resetting thermostat turns unit off, 120V at 135°C (257°F), 24°V at 95°C (203°F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 85°C (185°F). Thermal fuse cuts unit at 142°V (288°F)
Standby Power	0.3-0.4W
Timing Protection	60 seconds auto shut off
Sensing Range	170 mm ± 20 mm, Self adjusting
Drip Proof	IP21

### ORDERING INFORMATION

MODEL	CODE
TUBULAR DP TRIO (optional with hot and cold water)	350117
SOAP & WATER REMOTE CONTROL (OPTIONAL)	07100014

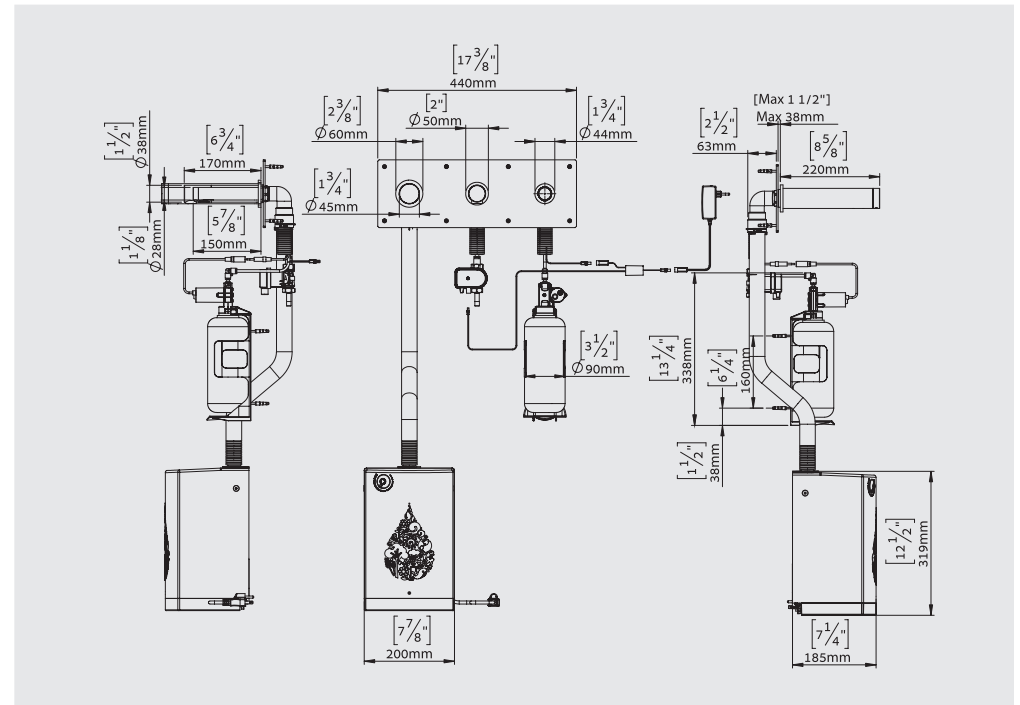

LEED RATING



OPTIONAL HYGIENE FLUSH



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED



777 Passaic Avenue  
Clifton NJ, 07012  
USA: sternusa@sternfaucets.com  
International: info@sternfaucets.com  
Toll Free: 1-800-4364410



www.sternfaucets.com