

TUBULAR DPL TRIO

Touch free soap dispenser, touch free faucet and hi-speed hand dryer for public bathroom use.
Operated by IR sensor.

Advantages:

- Drastically reduces water consumption.
- No physical contact. Helps to protect users against cross contamination.
- Minimizes hand washing drips to floors and counters
- Provides a complete electronic soap, water and air experience.

TUBULAR DP FAUCET - PRODUCT AT A GLANCE

Installation	Concealed wall mounted installation in hollow framed walls providing connection access below the sink
Power Supply	12V transformer (for faucet and soap dispenser with power splitter)
Operating pressure	0.5-8.0 BAR / 7.0-116.0 PSI
Water supply	Cold or premixed water
Water Saving Options	0.5 GPM ; 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	90 seconds. Adjustable by remote control

TUBULAR 2030 SOAP DISPENSER - PRODUCT AT A GLANCE


Installation	Concealed wall mounted installation in hollow framed walls providing connection access below the sink
Power Supply	12V transformer (for faucet and soap dispenser with power splitter)
Soap	0.26 gallon/ 1 liter soap bottle. Peristaltic pump enables the use of any kind of liquid soap, detergent or antibacterial gel
Soap Dose	Default setting: 1.2-1.6 cc Adjustable by remote control in accordance to the selected soap.
Refill	Soap priming operated by remote control or by easy-to-use manual refill button

TUBULAR DP HD - PRODUCT AT A GLANCE

Installation	Concealed wall mounted installation in hollow framed walls providing connection access below the sink
Power Supply	Supplied without cable to be wired on site
Operating Voltage	110V-120/220V-240VAC, 50/60 HZ, 1.3-1.6KW
Motor Thermal Protection	Auto resetting thermostat turns unit off, 120V at 135°C (257°F), 24°V at 95°C (203°F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 85°C (185°F). Thermal fuse cuts unit at 142°V (288°F)
Standby Power	0.3-0.4W
Timing Protection	60 seconds auto shut off
Sensing Range	170 mm ± 20 mm, Self adjusting
Drip Proof	IP21

ORDERING INFORMATION

MODEL	CODE
TUBULAR DPL TRIO	350114
SOAP & WATER REMOTE CONTROL (OPTIONAL)	07100014

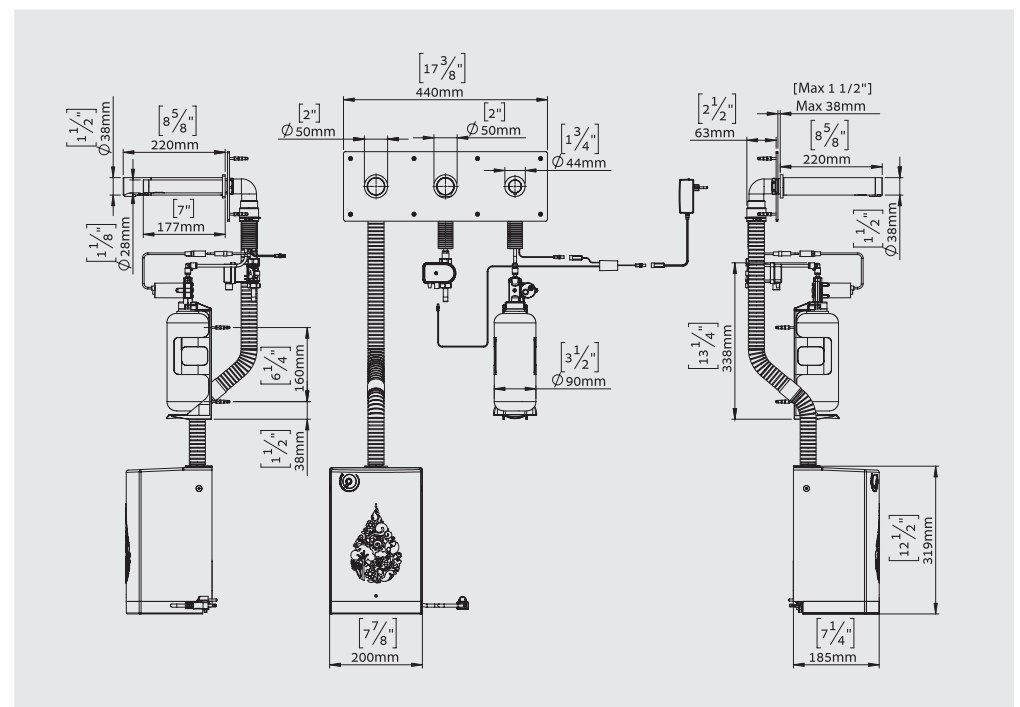

LEED RATING



OPTIONAL HYGIENE FLUSH



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410



www.sternfaucets.com