

# RECESSED MOUNTING DUO D28 DP AISI316

TOUCHLESS SOAP DISPENSER AND FAUCET FOR RECESSED MOUNTING BEHIND THE MIRROR OR PANEL

## SPECIFICATIONS

Touch-free wall-mounted electronic faucet. For cold or premixed water. Powered by IP67 Dual power input box connected with power splitter to 12V transformer. Integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure. Stainless Steel AISI316 body. Activated by concealed sensor built into the spout. Filter included. Sensor includes a low battery indicator. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. Matching touch free electronic soap dispenser for wall mounted installations. Stainless Steel AISI316 body. Activated by concealed sensor built into the spout. Includes a 2 liters soap bottle and bottle support. The following functions can be performed by using Stern remote control: soap quantity selection, refill the soap tank, temporary off, coming back to factory settings. Includes power splitter to enables both units to be powered from the same transformer.

## OPERATION

Touch-free electronic faucet and soap dispenser are automatically activated when users place their hands in the sensor range and stops when the users remove their hands. Soap dispenser closes automatically without dripping. The Csaba Petite Duo helps ensure hygiene and cleanliness in commercial restrooms with less space.

## APPLICATION

Combining an elegant design with vandal-resistant features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water and soap. Prevents cross contamination. Ideal for applications where smaller units are required such as public transport restrooms.

## PRODUCT AT A GLANCE

### WATER

Installation	wall mounted
Power Supply	IP67 Dual power input box connected with power splitter to 12V transformer
Operating pressure	0.5 - 8.0 bar (7 - 116 PSI). With a pressure over 8 bar, use a pressure reducing valve.
Water supply	Cold or premixed water
Water Saving options	0.5 GPM / 1.89 LPM - PCA spray 1.0 GPM / 4 LPM - PCA spray
Water temperature	70°C Maximum
Security Time	Auto shutoff after 90 seconds. adjustable by remote control


### SOAP

Installation	wall mounted. Regular installation with the bottle below the lavatory.
Power Supply	12V transformer
Soap Dose	Factory setting for 0.7 to 0.9 cc depending on the selected soap. The soap quantity can be changed using the soap dispensers remote control.
Refill	Easy to use refill button in order the soap will start to come out of the soap dispenser spout. This function can also be performed with the remote control.

## ORDERING INFORMATION

MODEL	CODE	OPTION	CODE
RECESSED MOUNTING DUO D28 DP AISI316	280500	Soap and Water Remote Control	07100014

## OPTIONS

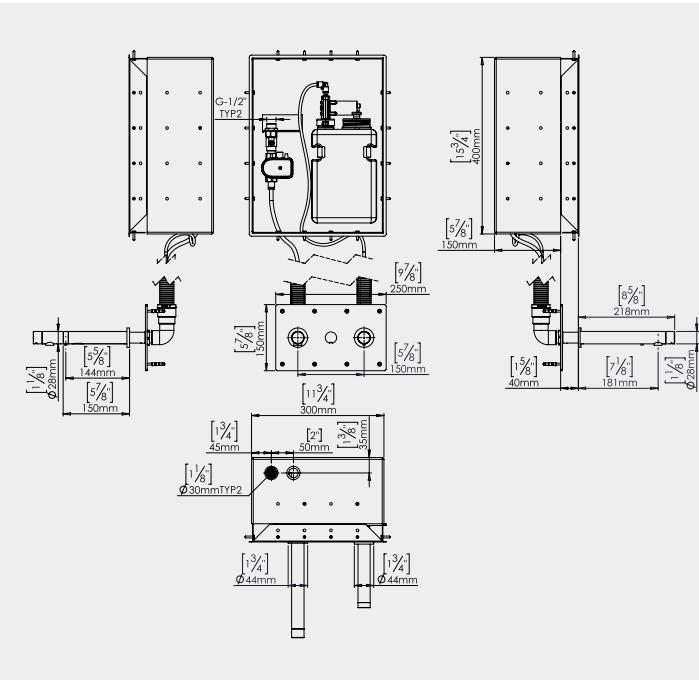

**stern**  
STERN ENGINEERING LTD.

## ADVANTAGES



LEED RATING



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



LEAD FREE



EASY TO INSTALL

777 Passaic Avenue  
Clifton NJ, 07012

USA: sternusa@sternfaucets.com

International: info@sternfaucets.com

Toll Free: 1-800-4364410

[www.sternfaucets.com](http://www.sternfaucets.com)