

D28 TOUCH-FREE ELECTRONIC WALL-MOUNTED FAUCET

SPECIFICATIONS

Touch-free wall-mounted electronic faucet. Activated by prox sensor unit. For installation in dry walls. For cold or premixed water. Powered by a 9V battery or a 9V transformer. Chrome plated body, other finishes available. Adjustable setting by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

OPERATION

The faucet will automatically activate when users place their hands in the sensor range and will stop once the users remove their hands.


APPLICATION

Wall-mounted faucet. Combines a minimalistic design with vandal resistant features. Helps washrooms stay clean and saves water. Easy installation. Long lasting even in the harshest installation sites. Ideal for shopping malls, sport facilities and entertainment centers.

PRODUCT AT A GLANCE

Installation	Concealed wall-mounted
Power Supply	• 9V battery • 9V Transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 PSI. For pressure over 8 bar use a pressure reducing valve
Water supply	Cold or premixed water
Water Saving Options	5 LPM / 1.32 GPM ;1.89 LPM / 0.5 GPM
Water temperature	70°C Maximum
Security Time	90 seconds. Adjustable by remote control

FLOW RATE vs PRESSURE



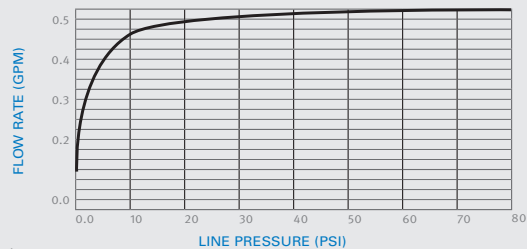


ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL SPECIFICATIONS
D 28 PROX B	352600	9V battery	Concealed installation in dry walls
D28 PROX E	352610	9V transformer	

OPTIONS

OPTION	CODE
Remote control	07100005

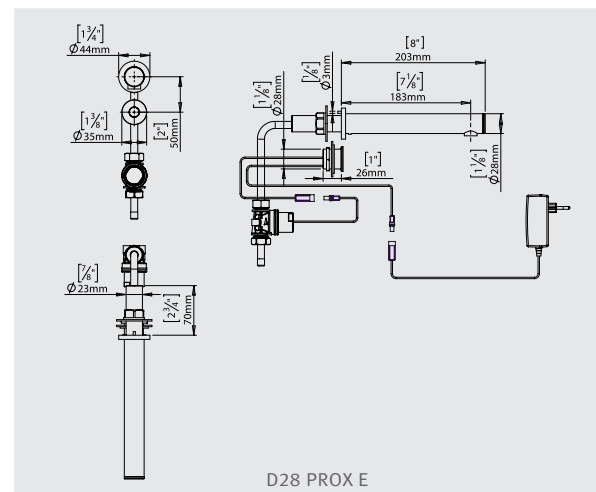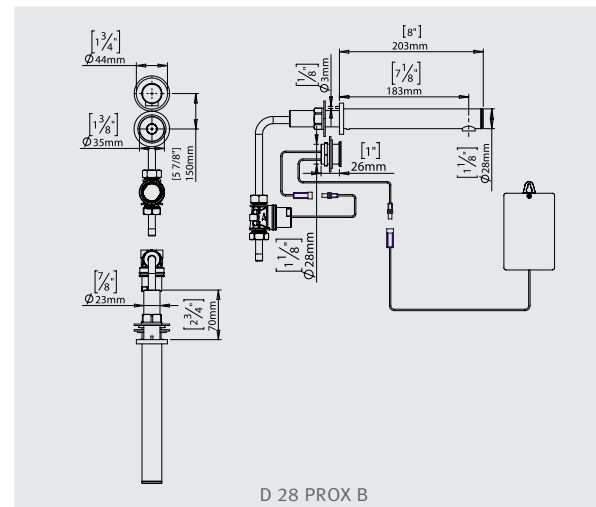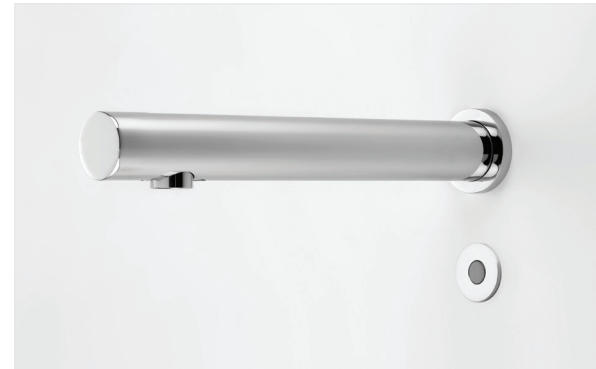

stern
STERN ENGINEERING LTD.

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED

APPROVALS



COMPLIES TO ASME
A112.18.1 / CSA B125.1

777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com